PRODUCT INFORMATION BULLETIN Bulletin # **260803**

DRM-7000 – 4 Readers/1 Recorder Configuration

This document provides a recommended configuration when using four ROM drives (readers) and a single writer drive (recorder) for the Pioneer DRM-7000 FlexLibrary. Please refer to the manuals shipped with the unit for more information.

Installation Check List

The following components are required for this configuration:

- (4) DVD-D7563 or DVD-D7362/7361 DVD/CD-ROM internal read drives
- (1) DVD-R7322 or DVD-R7211 Internal DVD-Recordable drive
- (1) DRM-SN711 Single drive rear panel SCSI connector
- (1) DRM-SC721 2-drive internal SCSI cable extension
- (1) DDG1006 SCSI Loop cable (shipped with DRM-7000)

Recommended Drive Arrangement

Pioneer recommends the following drive arrangement however alternative configurations are available if additional components are required. For best results, use a separate SCSI channel for the recordable drive.

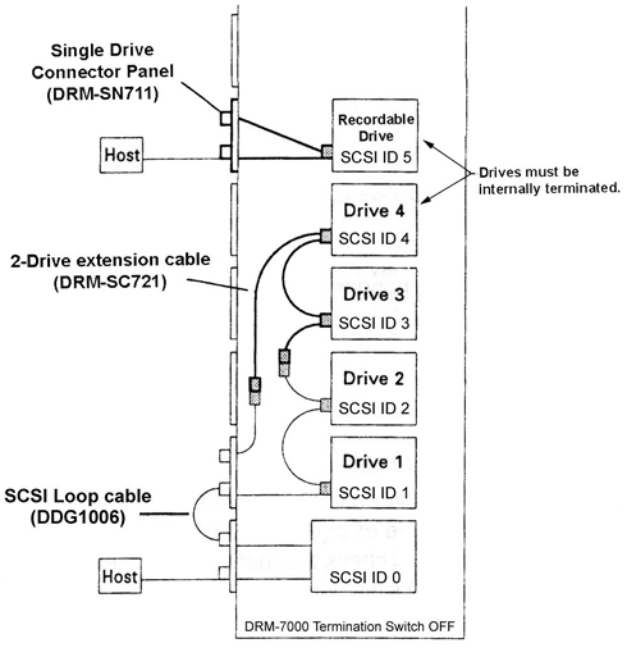
Single Drive Connector Panel (DRM-SN711)
Host
Recordable Drive SCSI ID 5
Drives must be internally terminated.
Drive 4 SCSI ID 4
2-Drive extension cable (DRM-SC721)
Drive 3 SCSI ID 3
Drive 2 SCSI ID 2
Drive 1 SCSI ID 1
SCSI Loop cable (DDG1006)
Host
SCSI ID 0
DRM-7000 Termination Switch OFF

Additional Information

For further assistance with this library system, please refer to the Pioneer website: www.pioneerelectronics.com.